

ASU 405 SUBMARINE BUOYS OPERATING UNIT

X-SUB

— ALSEAMAR

MAIN CHARACTERISTICS


- Buoys configuration

For SLRX 410 and SLRX 411 buoys:

- Display of the AIS and GPS data on the map
- NMEA Communication towards submarine equipment.

For SL2T 412 buoy:

- Frequency setting
- Link receiver voice transmission
- Link intercom (and scramble system? ADU)

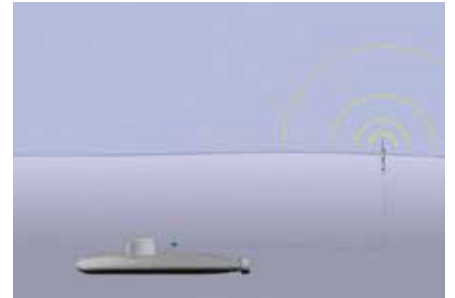

TYPICAL USE

- SLRX 410, SLRX 411, SL2T 412, SL2T 413 buoys operation.

TECHNICAL DATA

- Unit Dimension: L: 280 mm, l: 219 mm, P: 100 mm
- Interface data: RS422, RS232, Ethernet
- AIS data format: NMEA AIVDM
- GPS data format: NMEA GPGGA
- Data storage: USB in option
- Voice transmission interface: Entry/Exit 600 ohms + switch
- Buoy Dimension: Diameter: 3" Length: 975 mm



All values are typical